
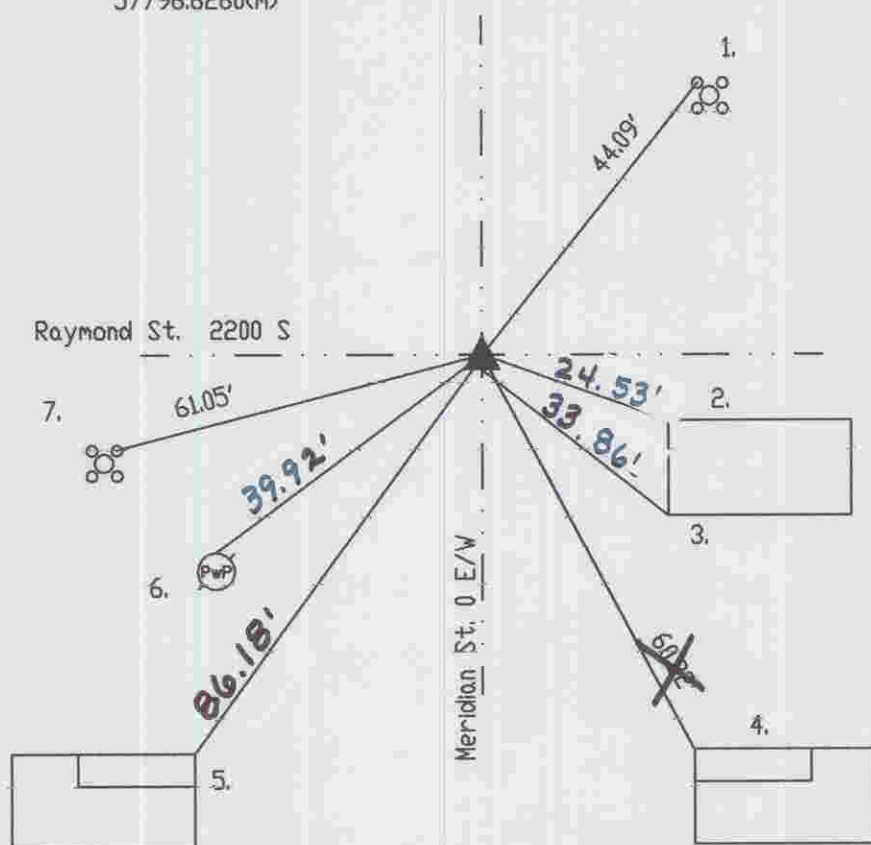


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 15 RANGE 3
DATE: 10-5-99 7-5-05
PARTY CHIEF: Kiste Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 3-12-92
EDM ties

IN. S.P.C. E ZONE, NAD 83
NAME: 15032401
N: 498440.4950(m)
E: 57796.6260(m)

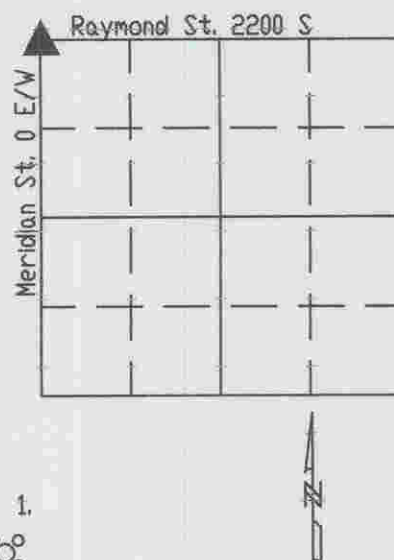

Original post set 1820 by Wm. B. Laughlin with witnesses: 14" sugar N 43 E 21 links, 12" buckeye S 58 W 26 links per Marion County Atlas pg. 6. 4-3-1868 Wm. P. Smith called stone with witness: 4" locust S 69 3/4 W 38 links per Center Township Legal Survey Book pg. 35. 10-14-79 Wilcoxon called a railroad spike. 3-12-92 Wilcoxon called the same. 8-3-92 Wilcoxon excavated and found stone 17" down. Set Harrison. Re-tied by Kiste 10-5-99.

HC532401

REF.	DISTANCE	DESCRIPTION
1.	44.09'	Cut 'x' NW bolt light base
2.	24.53'	NW corner of wooden home ADDRESS 2201 at ground
3.	33.86'	SW corner "
4.		NW corner top porch slab for ADDRESS 2205
5.	86.18'	NE corner "
6.	39.92'	Cut 'x' N PwP#54-605B , bolt 4" up
7.	61.05'	Cut 'x' NE bolt of light base